


# SSP TYPE

— Cylindrical Spline Nut —

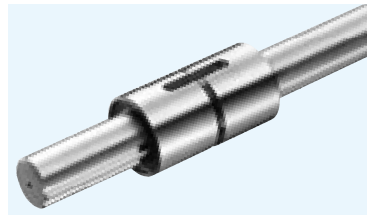

## part number structure

example **SSP 80 L-2 T1-600-P/CU**

specification  
**SSP**: standard  
**SSPS**: anti-corrosion

nominal diameter

nut length  
**blank**: standard  
**L**: long

number of nuts attached to one shaft


Note: retainer material is resin.

with special specification


accuracy grade  
**blank**: high  
**P**: precision

spline shaft total length


preload symbol  
**blank**: standard  
**T1**: light  
**T2**: medium

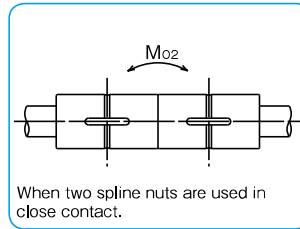

When two spline nuts are used in close contact.

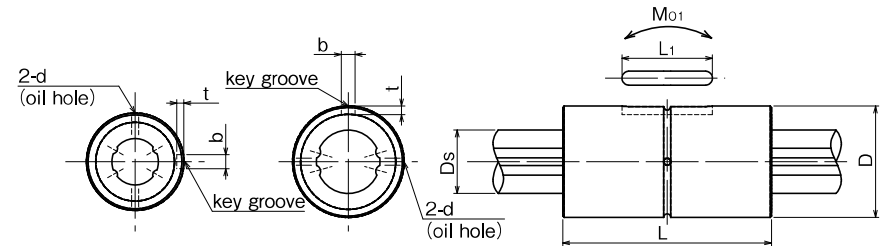

SSP4~10 SSP13A~60  
 ※SSP4 spline nut does not come with any oil hole.

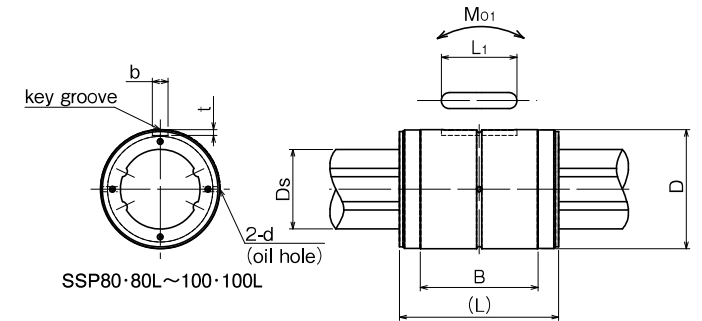

SSP80·80L~100·100L

part number		D		L		B		major dimensions					
standard	anti-corrosion	mm	tolerance μm	mm	tolerance mm	mm	mm	b	t	L <sub>1</sub>	d		
SSP 4	SSPS 4	10	0/-9	16	0 -0.2	-	2	+14 0	1.2	6	-		
SSP 6	SSPS 6	14	0	25			2.5		1.2	10.5	1		
SSP 8	SSPS 8	16	-11	25			2.5		1.2	10.5	1.5		
SSP 10	SSPS10	21	0	33			3	1.5	13	1.5			
SSP 13A	SSPS13A	24	-13	36			3	1.5	15	1.5			
SSP 16A	SSPS16A	31		50			3.5	2	17.5	2			
SSP 20A	SSPS20A	35	0	63			0 -0.3	-	4	+18 0	2.5	29	2
SSP 25A	SSPS25A	42	-16	71					4		2.5	36	3
SSP 30A	—	47		80					4		2.5	42	3
SSP 40A	—	64	0	100					6	3.5	52	4	
SSP 50A	—	80	-19	125	8	+22/0			4	58	4		
SSP 60A	—	90		140	12	5			67	4			
SSP 80	—	120	0	160	-	118.2			+27 0	6	76	5	
SSP 80L	—	120	-22	217		16				175.2	110		
SSP100	—	150	0	185		20				132.6	110		
SSP100L	—	150	-25	248		195.6			20	+33 0	7	160	5
SSP 20	SSPS20	32	0	60	0/-0.2	-	4	+18	2.5	26	2		
SSP 25	SSPS25	37		70	0 -0.3		5	0	3	33	3		
SSP 30	—	45	-16	80			7	+22	4	41	3		
SSP 40	—	60	0	100			10	0	4.5	55	4		
SSP 50	—	75	-19	112			15	+27	5	60	4		
SSP 60	—	90	0/-22	127			18	0	6	68	4		

SSP type spline nut comes with a key (refer to page B-14).

mm	Ds tolerance μm	basic torque rating		basic load rating		allowable static moment		mass		size
		dynamic C <sub>T</sub> N·m	static C <sub>0T</sub> N·m	dynamic C kN	static C <sub>0</sub> kN	Mo <sub>1</sub> N·m	Mo <sub>2</sub> N·m	nut kg	shaft kg/m	
4	0	0.74	1.05	0.86	1.22	1.97	10.3	0.0065	0.10	4
6	-12	1.5	2.4	1.22	2.28	5.1	40	0.019	0.21	6
8	0	2.1	3.7	1.45	2.87	7.4	50	0.023	0.38	8
10	-15	4.4	8.2	2.73	5.07	18.0	116	0.054	0.60	10
13	0	21	39.2	2.67	4.89	13.7	109	0.07	1.0	13A
16	-18	60	110	6.12	11.2	46	299	0.15	1.5	16A
20	0	105	194	8.9	16.3	110	560	0.22	2.4	20A
25	-21	189	346	12.8	23.4	171	1,020	0.33	3.7	25A
30	0	307	439	18.6	23.2	181	1,470	0.36	5.38	30A
40	0	674	934	30.8	37.5	358	2,940	0.95	9.55	40A
50	-25	1,290	2,950	40.3	64.9	690	4,080	1.9	15.0	50A
60	0	1,570	2,620	47.7	79.5	881	5,470	2.3	21.6	60A
80	-30	3,860	6,230	83.1	134	2,000	11,100	5.1	39	80
		5,120	9,340	110	201	4,410	21,100	7.6		80L
100	-35	6,750	11,500	135	199	3,360	19,300	9.7	61	100
		8,960	17,300	179	298	7,340	37,700	13.9		100L
18.2	0	83	133	7.84	11.3	63	500	0.2	2.0	20
23	-21	162	239	12.3	16.1	104	830	0.22	3.1	25
28	0	289	412	18.6	23.2	181	1,470	0.35	4.8	30
37.4	0	637	882	30.8	37.5	358	2,940	0.81	8.6	40
47	-25	1,390	3,180	46.1	74.2	696	4,400	1.5	13.1	50
56.5	0/-30	2,100	4,800	58.0	127	1,300	8,800	2.5	19	60

1kN≒102kgf 1N·m≒0.102kgf·m